
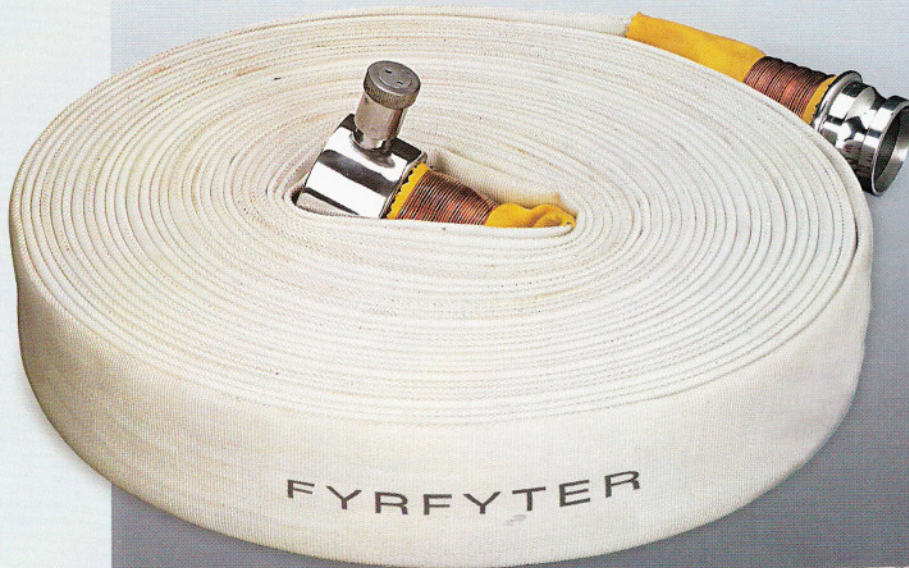





NEWAGE FIRE PROTECTION
INDUSTRIES PRIVATE LIMITED

- Polyester Jacketted
- Black Synthetic EPDM Rubber Lining
- Burst Pressure - 50 Kg/cm²
- Proof Pressure - 30 Kg/cm²
- Bearing IS : 638 : 88 Type A Mark
- Meets BS : 6391 Type 1 & 2, DIN 14811, UL 219, UL 19 EN 14540 (2004)
- Length - Upto 60 Mtrs.

Salient Features :

Jacket is made of 100% Polyester For Extra Strength


Special Quality EPDM Rubber Internal Lining To Withstand Heat & Polluted Water

Unaffected By Fungus

Heat & Abrasion Resistant

High Burst Pressure, Yet Quite Flexible Facilitating Operation

Light In Weight, Yet Durable

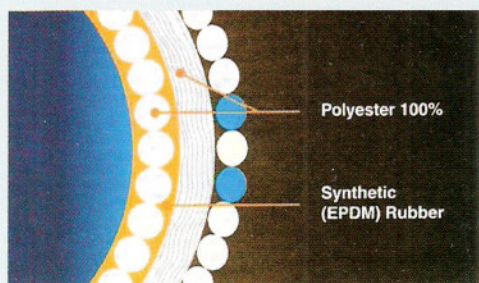

SPECIFICATION

Diameter : mm. Inches	25 1	38 1.1/2	45 1.3/4	50 2	63 2.1/2	70 2.3/4	76 3	102 4	127 5	152 6
Burst Pressure : Kgf / cm ² / bar PSI (Min.)	50 725	50 725	50 725	50 725	50 725	50 725	50 725	42 600	36 525	36 525
Proof Pressure : Kgf / cm ² / bar PSI	30 435	30 435	30 435	30 435	30 435	30 435	30 435	25 360	20 290	20 290
Kink Test Pressure : Kgf / cm ² / bar PSI	30 435	30 435	30 435	30 435	30 435	30 435	30 435	25 360	20 290	20 290
Working Pressure : Kgf / cm ² / bar PSI	17 250	17 250	17 250	17 250	17 250	17 250	17 250	15 215	12 175	12 175
30m. Length Coil Dia : Cms.	45	45	45	45	45	45	50	50	55	55
Mass per meter : Gms. (Max.)	200	275	325	350	425	480	525	800	950	1100
Abrasion Resistance : Cycles (Min.) at 7 kgf / cm ² Pressure	100	100	100	100	100	100	100	100	100	100
Heat Resistance : Sec. (Min.)	8	8	8	8	8	8	8	8	8	8

FYRFYTER SUPER Is Extra Strong And Abrasion Resistant, Having An External Coat Of Red Synthetic Elastomer, Providing Protection Against Moisture, Mildew, Fungus And Contact With Oils. Needs No Drying After Use.

STANDARD : RED

OPTIONAL : GREEN

(Min. Quantity 3000 Mtrs.)

BLUE

YELLOW

ORANGE

BLACK

Approvals :

Bureau of Indian Standards

Germanischer Lloyd

MED / Wheelmark

ALTERNATE BRANDS :

- PREMIER • NEWAGE PREMIER
- SUPREME • FIRE MASTER SUPER
- COMMANDER SUPER

- PREMIER EXTRA • NEWAGE PREMIER EXTRA
- SUPREME EXTRA • FIRE MASTER SUPER RED
- COMMANDER SUPER RED • NOVA DURA



NEWAGE FIRE PROTECTION
INDUSTRIES PRIVATE LIMITED

Head Office :

4, Champaklal Udyog Bhavan, Sion (East), Mumbai - 400 022, India.

Tel. : +91-22-2407 7421 / +91-22-4351 1500 • Fax : +91-22-2407 1320 / 2407 4229

E-mail : info@newagefireprotection.com • Website : www.newagefire.co

Works :

Khopoli, Maharashtra, India,